

**Features**

- ◆ Wide 2:1 input voltage range
- ◆ Compact SIP-8 package
- ◆ Cost optimized design
- ◆ Temperature range  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- ◆ I/O isolation 1000VDC
- ◆ Remote On/Off control
- ◆ Fully RoHS compliant
- ◆ 3-year product warranty



The TMR-2E series is a family of isolated 2 W dc-dc converter modules with regulated output, featuring wide 2:1 input voltage ranges. The product comes in a compact SIP-8 plastic package with small footprint occupying only 2.0 cm<sup>2</sup> (0.3 square in.) of board space.

An excellent efficiency allows  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  operation temperature. Further features include remote On/Off control and continuous short circuit protection. The compact dimensions and cost optimized design make this converters an ideal solution for applications in communication equipment, instrumentation and industrial electronics.

Models				
Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TMR 2-0510E	<b>4.5 – 9.0 VDC</b> (5 VDC nominal)	3.3 VDC	500 mA	70 %
TMR 2-0511E		5 VDC	400 mA	73 %
TMR 2-0512E		12 VDC	167 mA	75 %
TMR 2-1210E	<b>9 – 18 VDC</b> (12 VDC nominal)	3.3 VDC	500 mA	73 %
TMR 2-1211E		5 VDC	400 mA	77 %
TMR 2-1212E		12 VDC	167 mA	80 %
TMR 2-2410E	<b>18 – 36 VDC</b> (24 VDC nominal)	3.3 VDC	500 mA	72 %
TMR 2-2411E		5 VDC	400 mA	77 %
TMR 2-2412E		12 VDC	167 mA	81 %
TMR 2-4810E	<b>36 – 75 VDC</b> (48 VDC nominal)	3.3 VDC	500 mA	71 %
TMR 2-4811E		5 VDC	400 mA	73 %
TMR 2-4812E		12 VDC	167 mA	79 %

### Input Specifications

Input current at no load (nominal input voltage)	5.0 V models: 40 mA typ. 12 V models: 20 mA typ. 24 V models: 10 mA typ. 48 V models: 8 mA typ.
Input current at full load (nominal input voltage)	5.0 V models: 520 mA typ. 12 V models: 200 mA typ. 24 V models: 100 mA typ. 48 V models: 50 mA typ.
Surge voltage (1000 msec. max.)	5.0 V models: 15 V max. 12 V models: 25 V max. 24 V models: 50 V max. 48 V models: 100 V max.
Reverse voltage protection	1.0 A max.
Input voltage variation (dv/dt)	5 V/ms, max. (complies with ETS300 132 part 4.4)
Reflected input ripple current	5.0 V models: 400 mA typ. 12 V models: 300 mA typ. 24 V models: 200 mA typ. 48 V models: 500 mA typ.
Conducted noise (input)	EN 55022 level A, FCC part 15, level A with external capacitor (tba)

### Output Specifications

Voltage set accuracy	±2 % max.
Regulation	- Input variation Vin min. to Vin max. - Load variation 25 – 100% 0.5 % max. 0.75 % max.
Minimum load	25 % of rated max. load (operation at lower load condition is safe but a higher output ripple will be experienced)
Temperature coefficient	0.02 %/K
Ripple and noise (20 MHz bandwidth)	50 mVpk-pk max.
Transient response setting time (25 % load step change)	100 µs typ.
Current limitation	>120 % of lout max. constant current
Short circuit protection	continuous, automatic recovery
Capacitive load	3.3 VDC models: 2'200 µF max. 5 VDC models: 1'000 µF max. 12 VDC models: 170 µF max.

### General Specifications


Temperature ranges	- Operating - Case temperature - Storage -40°C to +85°C (with derating) +90°C max. -55°C to +105°C
Load derating	1.5 %/K above 65°C
Humidity (non condensing)	95 % rel. H max.
Reliability, calculated MTTF (MIL-HDBK-217F, @ +25°C, ground benign)	>1 Mio h
Isolation voltage (60 sec.)	- Input/Output 1'000 VDC
Isolation capacity	- Input/Output 120 pF max.
Isolation resistance	- Input/Output (500 VDC) >1 GOhm
Switching frequency	100 – 650 kHz (FM)
Remote On/Off	- On: - Off: - Off control input current - Off idle current: < 0.6 VDC (ref. to -Vin) or open circuit 2.7 to 15 VDC (ref. to -Vin) 1 mA max. 0.2 mA max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Physical Specifications**

Casing material	non-conductive plastic
Potting material	silicon, UL 94V-0 rated
Weight	4.8g (0.17 oz)
Soldering temperature	max. 260°C / 10 sec.

**Outline Dimensions**

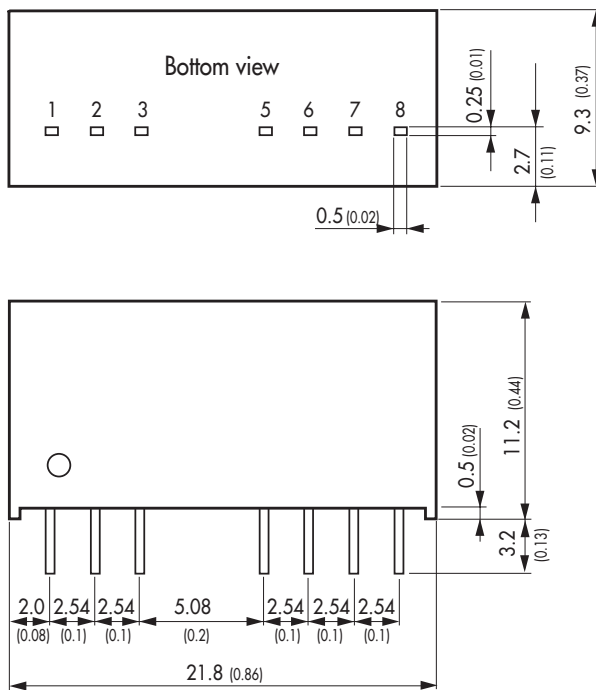

Pin-Out	
Pin	
1	-Vin (GND)
2	+Vin (Vcc)
3	Remote On/Off
5	No con.
6	+Vout
7	-Vout
8	No con.

No con. = Pin to be isolated from circuitry

Dimensions in [mm], ( ) = Inch  
Tolerances: ±0.5 (±0.02)  
Pin pitch tolerances: ±0.25 (±0.01)

Specifications can be changed any time without notice.