




Features

- ◆ Single-in-Line (SIL) Package
- ◆ Isolated Single and Dual Output Models
- ◆ I/O-Isolation 3'000 VDC
- ◆ High Efficiency up to 81%
- ◆ Extended Temperature Range
-40°C to +85°C
- ◆ Pin-compatible with other Manufacturers
- ◆ 100% Burn-in (8 h)
- ◆ Lead free Design, RoHS compliant
- ◆ 3 Year Product Warranty

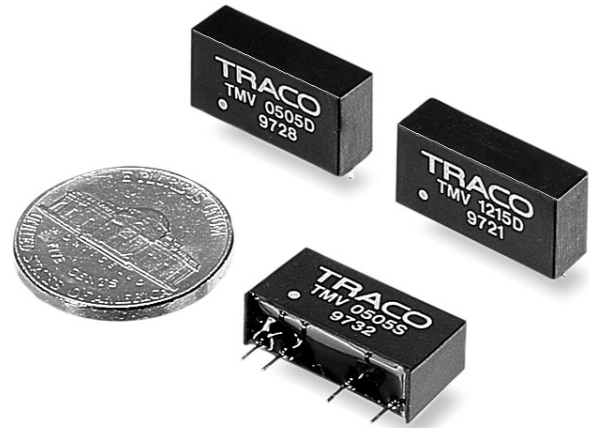

The TMV series are miniature, isolated 1 W DC/DC-converters with high isolation in a Single-in-Line package (SIP). Requiring only 1.2 cm² board space they offer the ideal solution in many space critical applications for board level power distribution. The use of SMD-technology makes it possible to offer a product with high performance at low cost.

Models				
Ordercode	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMV 0505S	5 VDC ±10%	5 VDC	200 mA	71 %
TMV 0512S		12 VDC	80 mA	78 %
TMV 0515S		15 VDC	65 mA	78 %
TMV 0505D		± 5 VDC	±100 mA	72 %
TMV 0512D		±12 VDC	± 40 mA	78 %
TMV 0515D		±15 VDC	± 30 mA	79 %
TMV 1205S	12 VDC ±10%	5 VDC	200 mA	73 %
TMV 1212S		12 VDC	80 mA	80 %
TMV 1215S		15 VDC	65 mA	80 %
TMV 1205D		± 5 VDC	±100 mA	74 %
TMV 1212D		±12 VDC	± 40 mA	81 %
TMV 1215D		±15 VDC	± 30 mA	81 %
TMV 2405S	24 VDC ±10%	5 VDC	200 mA	71 %
TMV 2412S		12 VDC	80 mA	78 %
TMV 2415S		15 VDC	65 mA	79 %
TMV 2405D		± 5 VDC	±100 mA	72 %
TMV 2412D		±12 VDC	± 40 mA	79 %
TMV 2415D		±15 VDC	± 30 mA	80 %

Input Specifications

Input current no load /full load	5 Vin models 12 Vin models 24 Vin models	30 mA / 260 mA typ. 12 mA / 110 mA typ. 7 mA / 50 mA typ.
Surge voltage (1 sec. max.)	5 Vin models 12 Vin models 24 Vin models	9 V max. 18 V max. 30 V max.
Reverse voltage protection		0.3 A max.
Reflected input ripple current*		can be reduced by ext. 1–3.3 μ F polyester film capacitor
Input filter		internal capacitor

Output Specifications

Voltage set accuracy		$\pm 3\%$
Voltage balance (dual output models)		$\pm 1\%$ max.
Regulation	– Input variation – Load variation 20 – 100 %	$\pm 1.2\%$ / 1 % change Vin $\pm 10\%$ max.
Ripple and noise (20 MHz Bandwidth)		100 mV pk-pk max.
Temperature coefficient		$\pm 0.02\%$ / K
Short circuit protection		limited 1 sec. max.
Capacitive load	single output models: dual output models:	680 μ F max. 220 μ F max.

General Specifications


Temperature ranges	– Operating – Case temperature – Storage	–40 °C ... +85 °C +95 °C max. –40 °C ... +105 °C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217E)		>2'000'000 h @ 25 °C
Isolation voltage	Input/Output	3'000 VDC
Isolation capacity	Input/Output	60 pF typ.
Isolation resistance	Input/Output	>10'000 M Ohm
Switching frequency		100 kHz typ. (Frequency modulation)
Frequency change over line and load		$\pm 30\%$ max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Case material	non conductive FR4 (UL 94V-0 rated)	
Package weight	- Single output models - Dual output models	2.1 g (0.07 oz) 2.6 g (0.09 oz)
Soldering temperature	max. 265°C / 10 sec	

Outline Dimensions mm (inches)

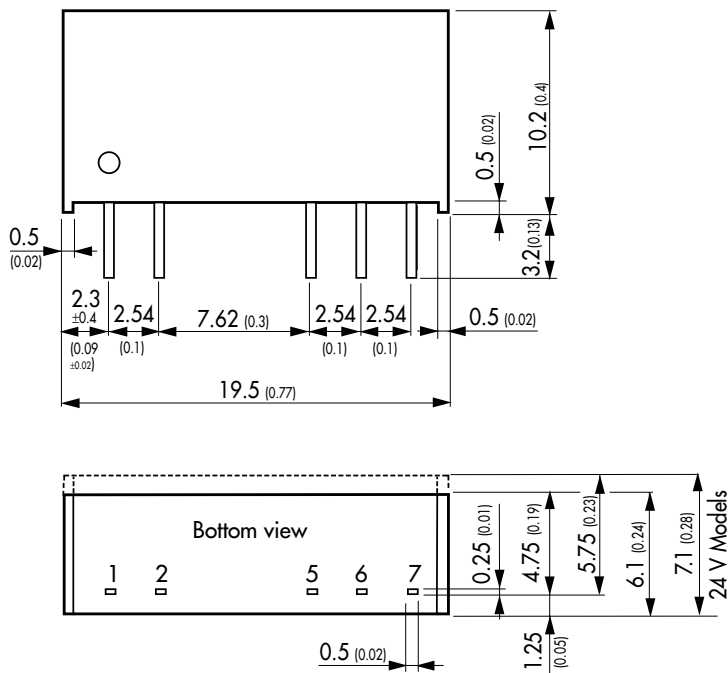

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
5	-Vout	-Vout
6	No pin	Common
7	+Vout	+Vout

Tolerances ±0.25 (0.01)
pins ±0.05 (0.002)

Specifications can be changed without notice